


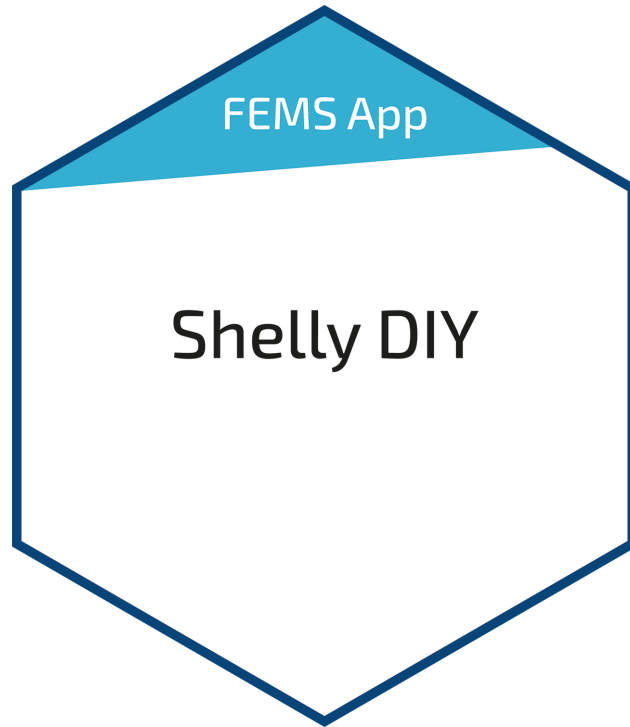

FEMS App Shelly DIY

Version:2025.12.1

Table of Contents

1. Introduction 2

2. Requirements for integration into EMS 2

2.1. Compatibility 2

3. Installation of the FEMS App Shelly DIY 2

3.1. Alias 3

3.2. Connection type 3

3.3. Device/IP address 5

3.4. Type of use. 5

4. Flat widget 5

5. FAQ — FEMS App Shelly DIY 6

6. Contact us 7

1. Introduction

1. Introduction

Dear customer,

The FEMS App Shelly DIY is available to you free of charge.

The following instructions explain the [installation](#) and [functionalities](#) of the app.

You are welcome to send us your suggestions so that we can further improve the quality of our products.

2. Requirements for integration into EMS

The Shelly Plug ...

- ... must be integrated in the same network as the EMS.
- ... must have a stable WIFI connection.
- ... must be set up via the proprietary Shelly app so that the consumption value can be displayed in the FEMS App Shelly DIY.

2.1. Compatibility

- Shelly Plug S Gen3
- Shelly Outdoor Plug S Gen3
- Shelly Plus Plug S

3. Installation of the FEMS App Shelly DIY

Instructions on the general procedure can be found [here](#).

Select the FEMS App Shelly DIY in the EMS App Center and click on *INSTALL APP*:



Image 1. Installation of the FEMS App Shelly DIY

This window will then open:

Shelly DIY

Alias*

Shelly DIY

Connection typ

Automatic (automatic network search) ▼

Device

▼

Phase

L1 ▼

Connected phase

Mount Type

Consumption-Meter ▼

INSTALL APP

Image 2. Configuration of the FEMS App Shelly DIY

3.1. Alias

A suitable alias for the Shelly Plug can be assigned here, e. g. *living room*.

3.2. Connection type

There are two options here:

3.2. Connection type



	1. <i>Manual input</i> If you select <i>Manual input</i> and click on <i>OK</i>, you must then enter the IP address of the Shelly Plug manually. The IP of the Shelly Plug can be found in the web interface of your router or the Shelly Smart Control app (see image). You must also select the device type (in this case: Shelly Plug).  The IP address of the EMS should be set in the router to Always assign the same IPv4 address to this network device.
	2. <i>Automatic</i> The FEMS App Shelly DIY lists all Shelly Plugs in the same network. If the corresponding Shelly Plug was found, select it and click on <i>OK</i>.

Table 1. Connection types

3.3. Device/IP address

Depending on whether you have opted for *Manual entry* or *Automatic* search, the IP entered or the device selected from the list is displayed here.

3.4. Type of use

Select whether the Shelly Plug is to be used as a production or consumption meter. Depending on its use, the corresponding widget (Production or Consumption) will be displayed in the FENECON Online Monitoring later.

Complete the configuration by clicking on *INSTALL APP*.

4. Flat widget

After successful installation of the FEMS App Shelly DIY, the following flat widget is displayed in the FENECON Online Monitoring, depending on the type of use:

 Production	 Consumption
Generator0 kW	Emergency power consumer0 kW
Barn0.1 kW	Shelly DIY0 kW
PV West0.3 kW	Freezer0 kW
PV Ost0 kW	other consumption0.2 kW

Click on the Shelly flat widget to open the advanced view.

CONSUMPTION	
Phase L2	0 W
Phase L3	38 W
Emergency power consumer	
Phase L1	0 W
Phase L2	0 W
Phase L3	1 W
Shelly DIY	
Phase L1	5 W
Phase L2	-
Phase L3	-
Freezer	
Phase L1	0 W
Phase L2	-
Phase L3	-
other consumption	174 W
For technical reasons, the sum of the individual phases can slightly deviate from the total sum.	

Image 4. Shelly flat widget — Advanced view

5. FAQ — FEMS App Shelly DIY

❓ I get the error "SlaveCommunicationFailed" and no measured values are displayed.

This may be due to an incorrectly entered IP address for the Shelly Plug. Check the manually entered IP address and adjust it if necessary.

❓ I receive the message "Device read out does not match selected Shelly model. Check device compatibility and model information.".

This message appears if an incompatible device has been integrated. The FEMS App Shelly DIY is compatible with the following devices:

- Shelly Plug S Gen3
- Shelly Outdoor Plug S Gen3
- Shelly Plus Plug S

6. Contact us

For support, please contact:

Symphon-E Service

Service phone: +49 (0) 371 45 85 68 - 100

E-mail service: symphon-e@heckert-solar.com